




DESIGNED TO RESIST  
AGAINST **HIGH SPEED**  
**DRILLS AND FORCE**

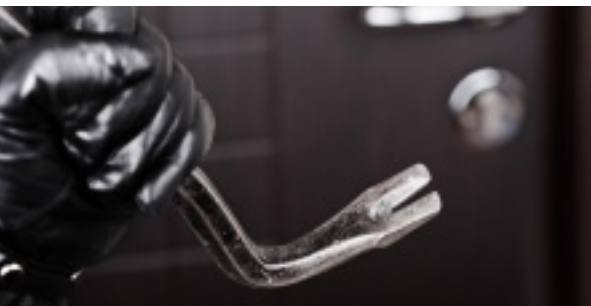

# 2" STRONGROOM DOOR

BURGLARY-RESISTANT PROTECTION



## KEY FEATURES

- Solid door slab with a protective thickness of 50mm (2") forms the basis of the door, which has an overall thickness of 165mm. Filled with special formulated Chubb safes F80 barrier material reinforced with steel fibres provides resistant to high speed drilling, oxy-acetylene cuttings and jack attacks
- Secured by 7 active front bolts, 2 active top bolts, 2 active bottom bolts and 7 passive back bolts. Each bolt has a diameter of 32mm.
- Secured by a 3-wheel Keyless Combination Lock and a 8-lever double bitted Key Lock as standard. Both locks operated independently.
- The Keyless Combination Lock is protected by Glass Relockers. Any forced attempt to dislodge the locks would activate relocker and restricts the movement of the internal boltwork system.
- Relocker is further protected by drill resistant hard plates.
- The door comes standard with a painted grey primer based finish.

# 2" STRONGROOM DOOR

## PRODUCT SPECIFICATIONS


Model	External Dimensions (mm)	Clear Opening (mm)	Wall Opening (mm)	Wall Thickness (mm)	Approx. Net Weight (kg)
2"	2110(H) x 1273(W)	1920(H) x 814(W)	2060(H) x 1070(W)	200 mm (inclusive of Plastering)	640 kg (Door) and 20 kg (Gate)

### STANDARD LOCKS



#### KEYLESS COMBINATION LOCK


Secured by a 3-wheel Keyless Combination Lock capable of 1,000,000 changes of code. The operation of this lock is simple. The code can be changed easily and security can be maintained over the safe whenever there is a change of staff.



#### KEYLOCK

The door is secured by a 8-lever double bitted key lock from Germany

### "WRAP AROUND WALL" FRAME



Door frame is fabricated from steel sections, bent to form a single structure. Vestibule side frames at full height of the door are attached to the frame and grip the inside of wall.

This design provides stronger resistance against attacks to the door.

### WHEN ORDERING, PLEASE STATE:

- Thickness of RC wall
- Hung of door required
- If to be installed in multi-storey building, state floor level
- Path of access to where door is to be installed.

### NOTE

Chubbsafes Doors are designed primarily against physical attack, but for recommended storage of paper documents and computer media, ask for details for of Chubbsafes Fire Resistant Protection Cabinet or Chubbsafes Data Cabinets.

### OPTIONS



#### LOCKS:

- Electronic Lock
- A Dial Check Lock can be fitted as an option to the combination lock.
- Two or three movement Time Lock may be fitted as an additional requirement



#### EMERGENCY VENTILATOR

Emergency ventilator can be fitted as an option.



#### DAY GATE

An Optional Day Gate can be fitted to the door for ventilation during the day or as control when the door is open. The Day Gate is secured by two high security 5-lever Mortice Deadlocks.



#### FIRE RATING

An option if required, a fire rated back panel can be added to have a fire resistance for 120 minutes in accordance with BS476 Part 22:1987 FireTest on Building Material and Structures.

MARKETED BY **GUNNEBO**

www.chubbsafes.com

**Chubbsafes**  
Trusted the world over.

Kuwait Authorised distributor	التوزيع المعتمد الكويت
<b>KAVAL</b> SECURITY SYSTEMS & EQUIPMENT COMPANY	<b>كافل</b> للاجهاز والانظمة الامنيه وتركيبها وصيانتها
Mobile : +965 65700890 / 6579 6652	
Office: Farwaniya, 2nd Floor, Office # 15, Habeeb Munawe Street, Megateer Complex, Kuwait. Tel / Fax: +965 24773210.	
صالة العرض: بالقرب من الأفنيوز Showroom: Near to Avenues Al Rai, Hamad Rashed Al Alban Street, Opp. to Party Land. Fax: +965 24773210. Mob: +965 60645647, 65700890	
Email: info@kaavalsecurity.com Web: www.kaavalkuwait.com	

Location Map	خريطه الموقع